




WAXITY[®]
LUBRICANT

Protect Our Engine, Secure Our Future

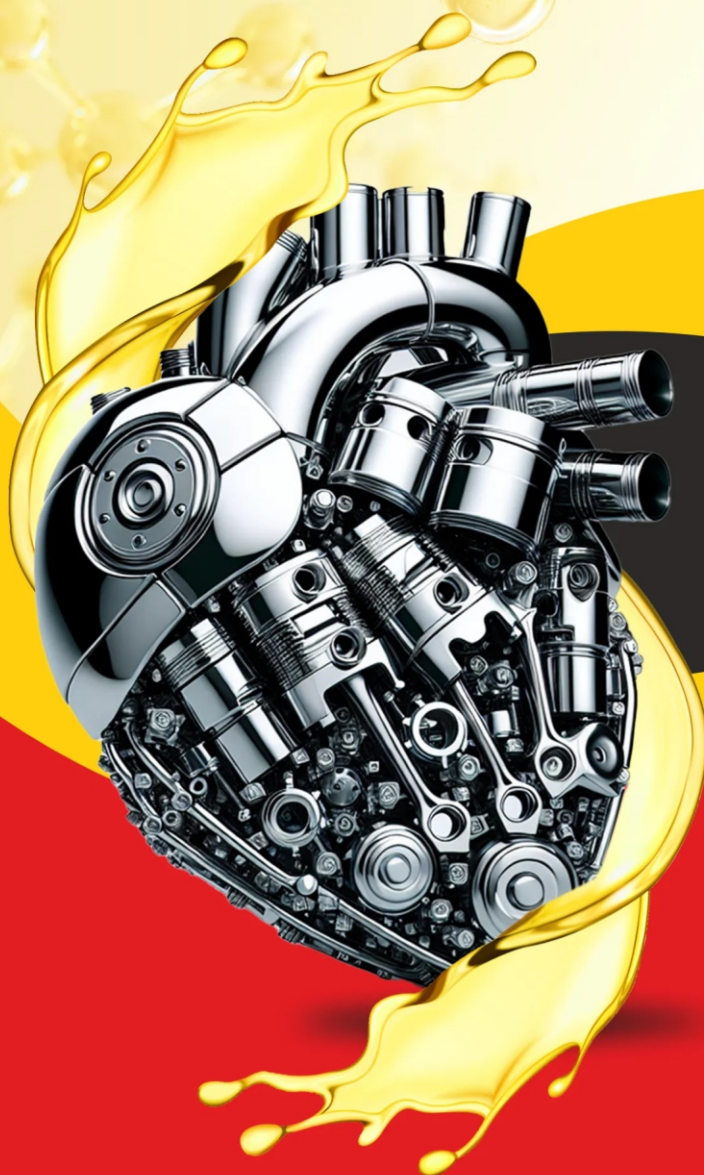

**We Don't Create Clients,
We Create Long-term Relationships.**

PRODUCT CATALOGUE



VISION

“Be a dominant lubricant oil and grease company with significant national and international presence, Integrated to lubricant and other petroleum-products”

Drive for achieving the above vision

- R & D Infrastructure for innovative products.
- Superior manufacturing infrastructure.
- Skilled and experienced manpower.
- Manufacture & supply of quality products.

MISSION

To achieve international standards in all aspects of lubricants and greases with focus on customer delight through value of its products and services and responsible environmental performance.

- To maximize creation of wealth, value and satisfaction for all stake holders.
- To obtain leadership in developing, adopting state-of-the-art technology for competitive advantage.
- To cultivate high standard of business ethics and quality and environmental management.
- We aim to work closely with our customers and partners to advance more efficient and sustainable use of energy and natural resources.
- To seek a high standard of performance, containing a strong long-term and growing position in the competitive environment.

CERTIFICATES



Scan this QR code with smartphone to visit our website



Certificate of Registration

This is to certify that the Quality Management System of

WAXITY LUBRICANT

PLOT NO. 51-52-53, SHIV BHAKTI INDUSTRIES, KADODARA TO PALSANA HIGHWAY, KARAN, VILLAGE SANKI, CHALTHAN, SURAT, GUJARAT - 394305, INDIA

has been assessed independently by RQC and found to comply with the requirements of

(Quality Management System)

ISO 9001:2015

For the following scope:

MANUFACTURER OF LUBRICANT OIL, ENGINE OIL, HYDRAULIC OIL, GEAR OIL, INDUSTRIAL OIL, AUTOMOTIVE GREASE AND AUTO PARTS

Certification Calendar:

Certificate No: INQ29071353/11353

Registered on: 29.07.2024

Issued on: 29.07.2024

Expires on: 28.07.2027

1st Surveillance on/before: 28.07.2025

2nd Surveillance on/before: 28.07.2026


Executive Director
RADIANCE QUALITY CERTIFICATIONS
Regd. Office: 20-22 Winkfield Rd, Histon, London N1 7GU, UK



Regd. off: 20-22 Winkfield Rd, Histon, London N1 7GU, UK
Terms & conditions

1. Validity of this certificate is subject to the organization maintaining its system in accordance with respective management systems standards along with RQC requirements.
2. This certificate remains the property of Radiance Quality Certifications to whom it must be returned upon request.
3. Use of logo must be in accordance with the requirements of the UKAS accreditation board (in any failure to meet the requirement shall be held liable for actions).
4. This certificate is not final evidence of certification status, status must be verified by writing from info@radiance.co.uk or it can be verified online at <http://ukasid.co.uk/certificate-check>



संघीय जयते

Government of India / भारत सरकार

Ministry of Commerce and Industry / वाणिज्य और उद्योग मंत्रालय

Directorate General of Foreign Trade / विदेश व्यापार महानिदेशालय

Office of the Joint Director General of Foreign Trade, Surat / संयुक्त महानिदेशक, विदेश व्यापार का कार्यालय, सुरत

6th Floor, Resham Bhavan, Lal Darwaja, SURAT, GUJARAT, 395003 / छठी मंजिल, रेशम भवन, लाल दरवाजा, सुरत, सुरत, गुजरात, 395003

Importer-Exporter Code

This is to certify that WAXITY LUBRICANT is issued an Importer-Exporter Code (IEC) AADFW3757F with details as follows -

IEC	AADFW3757F
स्वाई खाता सं.(पैन) / PAN	AADFW3757F
फर्म का नाम/Firm Name	WAXITY LUBRICANT
निगम की प्रकृति /Nature of Concern	Partnership
जारी करने की तारीख/Date of Issue	12/04/2021
पता/Registered Address	PLOT NO. 51 TO 53, SHIV BHAKTI INDUSTRIES, VILLAGE : SANKI, KARAN, KADODARA TO PALSANA HIGHWAY, PALSANA, SURAT, SURAT, GUJARAT, 394305
धारक का नाम / Name of the Signatory	DHARMESHBHAI AMRSHIBHAI GABANI
Director / Partner Details	Refer online at https://dgft.gov.in or scan the QR Code
शाखा/इकाई/Branch Details	Refer online at https://dgft.gov.in or scan the QR Code

Last Modified : 27/04/2024
File Number : SRTIECPAMEND00002499AM25



Note : This is a system-generated certificate. Authenticity / Updated details of the IEC can be checked at official DGFT website <https://dgft.gov.in> by entering the IEC and Firm Name under Services > View Any IEC Details. You can also authenticate the certificate by scanning the QR code.



भारत सरकार
Government of India
व्यापार चिन्ह रजिस्ट्री
Trade Marks Registry
व्यापार चिन्ह अधिनियम, 1999
Trade Marks Act, 1999
व्यापार चिन्ह के रजिस्ट्रेशन का प्रमाणपत्र, धारा 23 (2), नियम 56 (1)
Certificate of Registration of Trade Mark, Section 23 (2), Rule 56 (1)

व्यापार चिन्ह संख्या / Trade Mark No. 4807692
दिनांक /Date 05/01/2021
अ. संख्या /J. No. 1984

यह प्रमाणित किया जाता है कि जिस प्रकार चिन्ह की समकृति इसके साथ संगत है, वह नाम के रजिस्ट्री हो चुका है।
Certified that Trade Mark / a representation is annexed hereto, has been registered in the name(s) of:-
DHARMESHBHAI AMRSHIBHAI GABANI, 51 TO 53, SHIV BHAKTI INDUSTRIES, KADODARA TO PALSANA HIGHWAY, VILLAGE SANKI, SURAT, GUJARAT-394395, Trading as : WAXITY LUBRICANT, (Partnership Firm)

In Class 4 Under No. 4807692 as of the date 05 January 2021 in respect of

Goods and service as annexed

Trade Mark as annexed

मेरे निर्देश पर आज के मस के वे दिन को इस पर मुहर लगाई गई
Sealed at my direction, this 12th day of June, 2021



व्यापार चिन्ह रजिस्ट्री
Trade Marks Registry MUMBAI


व्यापार चिन्ह रजिस्ट्रार
Registrar of Trade Marks

(रजिस्ट्रेशन के बाद 10 वर्षों की अवधि के लिए है और प्रत्येक वर्ष 10 वर्ष की अवधि के लिए और प्रत्येक 10 वर्ष की अवधि के अंतर्गत 10 वर्ष की अवधि के लिए अंतिम पुनः विचार किया जा सकता है।)
Registration is for 10 years from the date of application and may then be renewed for a period of 10 years and also at the expiration of each period of 10 years.
हम कानून के अनुसार चिन्ह के रजिस्ट्रेशन के लिए या फिर 10 वर्ष के रजिस्ट्रेशन के अंतर्गत 10 वर्ष के लिए अंतिम पुनः विचार किया जा सकता है।
This certificate is not for use in legal proceedings or for obtaining Registration abroad.
ध्यान दें: इस व्यापार चिन्ह के रजिस्ट्रेशन के बाद 10 वर्षों की अवधि के लिए है, या 10 वर्षों की अवधि के लिए और प्रत्येक 10 वर्ष की अवधि के लिए अंतिम पुनः विचार किया जा सकता है।
Note: Upon any change of ownership of this Trademark, or change in address, of the principal place of business or address for service in India a request should AT ONCE be made to register the change.



भारत सरकार
Government of India
सूक्ष्म, लघु एवं मध्यम उद्यम मंत्रालय
Ministry of Micro, Small and Medium Enterprises



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES

UDYAM REGISTRATION CERTIFICATE

UDYAM REGISTRATION NUMBER UDYAM-GJ-22-0030188

NAME OF ENTERPRISE WAXITY LUBRICANT

S.No.	Classification Year	Enterprise Type	Classification Date
1	2024-25	Micro	27/04/2024
2	2023-24	Micro	09/05/2023
3	2022-23	Micro	26/06/2022
4	2021-22	Micro	16/05/2021

TYPE OF ENTERPRISE *

MAJOR ACTIVITY

SOCIAL CATEGORY OF ENTREPRENEUR

NAME OF UNIT(S)

S.No.	Name of Unit(s)
1	WAXITY LUBRICANT

OFFICIAL ADDRESS OF ENTERPRISE

Flat/Door/Block No.	PLOT NO. 51-52-53	Name of Premises/ Building	SHIV BHAKTI INDUSTRIES
Village/Town	PALSANA	Block	VILLAGE : KARAN, SANKI
Road/Street/Lane	KADODARA TO PALSANA ROAD	City	SURAT
State	GUJARAT	District	SURAT, Pin 394315
Mobile	9022250430	Email:	waxitylubricant@gmail.com

DATE OF INCORPORATION / REGISTRATION OF ENTERPRISE 04/12/2019

DATE OF COMMENCEMENT OF PRODUCTION/BUSINESS 15/10/2022

S.No.	NIC 2 Digit	NIC 4 Digit	NIC 5 Digit	Activity
1	19 - Manufacture of coke and refined petroleum products	1920 - Manufacture of refined petroleum products	19201 - Production of liquid and gaseous fuels, illuminating oils, lubricating oils or greases or other products from crude petroleum or bituminous materials	Manufacturing

DATE OF UDYAM REGISTRATION 28/12/2020

* In case of graduation (upward/reverse) of status of an enterprise, the benefit of the Government Schemes will be available as per the provisions of Notification No. S.O. 2119/E dated 26.06.2020 issued by the Mo MSME.

Disclaimer: This is computer generated statement, no signature required. Printed from <https://udyamregistration.gov.in> & Date of printing: 18/05/2024

For any assistance, you may contact:

1. District Industries Centre: SURAT (GUJARAT)
2. MSME-DFO: AHMEDABAD (GUJARAT)

Visit : www.msme.gov.in ; www.dcmsme.gov.in ; www.championsofmsme.gov.in

Follow us @minmsme & @msmechampions



BE A CHAMPION with the Ministry of MSME



*Bike &
Moped Engine Oil*

• BIKE & MOPED ENGINE OIL •

• FORMAL 20W40 API SJ/JASO MA •



DESCRIPTION

Waxity 20W40 API SJ/JASO MA is a high performance engine oil, especially designed for modern motorcycles. Though developed for latest technology, It provides good protection for old technology engines too.

MEETS OR EXCEEDS.
API SJ / JASO MA

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.852
Viscosity @100°C, cSt	ASTM D 445	14.70
Viscosity @40°C, cSt	ASTM D 445	115.13
Viscosity Index	ASTM D 2270	120
Pour Point, °C	ASTM D 97	-22
Flash Point, °C	ASTM D 92	233
TBN, mgKOH/gm	ASTM D 892	5.6

PACKAGING SIZE

900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr

• CLASS 20W40 API SL/JASO MA2 •

DESCRIPTION

Waxity 20W40 API SL/JASO MA2 is a high performance engine oil, especially designed for modern motorcycles. Though developed for latest technology, It provides good protection for old technology engines too.

MEETS OR EXCEEDS.
API SL / JASO MA2

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.865
Viscosity @100°C, cSt	ASTM D 445	14.27
Viscosity @40°C, cSt	ASTM D 445	114.88
Viscosity Index	ASTM D 2270	125
Pour Point, °C	ASTM D 97	-27
Flash Point, °C	ASTM D 92	235
TBN, mgKOH/gm	ASTM D 892	6.3

PACKAGING SIZE

900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr



• SPARK 20W40 API SM/JASO MA2 •



DESCRIPTION

Waxity 20W40 API SM/JASO MA2 is a high performance engine oil, especially designed for modern motorcycles. Though developed for latest technology, It provides good protection for old technology engines too.

MEETS OR EXCEEDS.
API SM / JASO MA2

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.869
Viscosity @100°C, cSt	ASTM D 445	15.38
Viscosity @40°C, cSt	ASTM D 445	127.48
Viscosity Index	ASTM D 2270	125
Pour Point, °C	ASTM D 97	-27
Flash Point, °C	ASTM D 92	237
TBN, mgKOH/gm	ASTM D 892	6.5

PACKAGING SIZE

900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr

• ONE1 20W40 API SN/JASO MA2 •

DESCRIPTION

Waxity 20W40 API SN/JASO MA2 is a high performance engine oil, especially designed for modern motorcycles. Though developed for latest technology, It provides good protection for old technology engines too.

MEETS OR EXCEEDS.
API SN / JASO MA2

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.875
Viscosity @100°C, cSt	ASTM D 445	16.50
Viscosity @40°C, cSt	ASTM D 445	140.08
Viscosity Index	ASTM D 2270	126
Pour Point, °C	ASTM D 97	-27
Flash Point, °C	ASTM D 92	241
TBN, mgKOH/gm	ASTM D 892	6.7

PACKAGING SIZE

900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr



• BIKE & MOPED ENGINE OIL •

• CROOZE 10W30 API SN/JASO MB •



DESCRIPTION

Waxity 10W-30 API SN /JASO MB is an synthetic bike engine oil enhanced with high quality additives for the latest generation four stroke motorcycles. This high-quality oil helps maintain a cleaner engine and improves efficiency.

MEETS OR EXCEEDS.
API SN / JASO MB

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.851
Viscosity @100°C, cSt	ASTM D 445	10.69
Viscosity @40°C, cSt	ASTM D 445	66.81
Viscosity Index	ASTM D 2270	149
Pour Point, °C	ASTM D 97	-33
Flash Point, °C	ASTM D 92	238
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

600ml, 650ml, 800ml, 850ml 900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr

• SPECIAL-X 10W40 API SN/JASO MB •

DESCRIPTION

Waxity 10W-40 API SN /JASO MB is an synthetic bike engine oil enhanced with high quality additives for the latest generation four stroke motorcycles. This high-quality oil helps maintain a cleaner engine and improves efficiency.

MEETS OR EXCEEDS.
API SN / JASO MB

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.860
Viscosity @100°C, cSt	ASTM D 445	15.50
Viscosity @40°C, cSt	ASTM D 445	105.95
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash Point, °C	ASTM D 92	232
TBN, mgKOH/gm	ASTM D 892	7.8

PACKAGING SIZE

800ml, 900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr



• MASSIVE-X 20W50 API SN/JASO MA2 •



DESCRIPTION

Waxity 20W50 API SN/JASO MA is a high-performance engine oil, especially designed for modern motorcycles. Though developed for latest technology, It provides good protection for old technology engines too.

MEETS OR EXCEEDS.
API SN / JASO MA2

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.880
Viscosity @100°C, cSt	ASTM D 445	19.5
Viscosity @40°C, cSt	ASTM D 445	169.27
Viscosity Index	ASTM D 2270	132
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	242
TBN, mgKOH/gm	ASTM D 892	7.8

PACKAGING SIZE

900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr

• VIRTUE 15W50 API SN/JASO MA2 •

DESCRIPTION

Waxity 15W-50 API SN / JASO MA2 is a synthetic blend formulated specifically for new generation higher CC four- stroke motorcycles ideal for daily commute or recreational riding.

MEETS OR EXCEEDS.
API SN / JASO MA2

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.860
Viscosity @100°C, cSt	ASTM D 445	18.90
Viscosity @40°C, cSt	ASTM D 445	155.10
Viscosity Index	ASTM D 2270	138
Pour Point, °C	ASTM D 97	-28
Flash Point, °C	ASTM D 92	244
TBN, mgKOH/gm	ASTM D 892	6.2

PACKAGING SIZE

1.7ltr, 2.5ltr, 3ltr, 20ltr, 55ltr, 210ltr



• BIKE & MOPED ENGINE OIL •

• SCOUT 5W30 API SP/ACEA A5/B5 •



DESCRIPTION

Waxity Synthetic Engine Oil SAE 5W30 API SP ACEA A5/B5 is an advanced synthetic motorcycle oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SP / ACEA A5/B5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	11.5
Viscosity @40°C, cSt	ASTM D 445	68.20
Viscosity Index	ASTM D 2270	164
Pour Point, °C	ASTM D 97	-39
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

600ml, 650ml, 800ml, 850ml
1Ltr, 20ltr, 55ltr, 210ltr

• SUPER 2T API TC/JASO FC •

DESCRIPTION

Waxity 2T API TC/JASO FC is a new generation semi-synthetic, extremely low smoke, environmentally friendly two stroke engine oil. It blended from highly virgin mineral base oil, special synthetic base fluid and fortified with finely balanced low ash additives.

MEETS OR EXCEEDS.
API TC / JASO FC

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.847
Viscosity @100°C, cSt	ASTM D 445	7.2
Viscosity @40°C, cSt	ASTM D 445	42.2
Viscosity Index	ASTM D 2270	134
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	160
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

900ml, 1Ltr, 1200ml, 20ltr, 55ltr, 210ltr



PERFORMANCE THAT LASTS, RIDE AFTER RIDE.

For riders seeking lasting protection



**SPECIAL
FORMULATION**



**360° ENGINE
DEFENCE**




**ULTIMATE
PERFORMANCE**



**SMOOTH
RIDE**



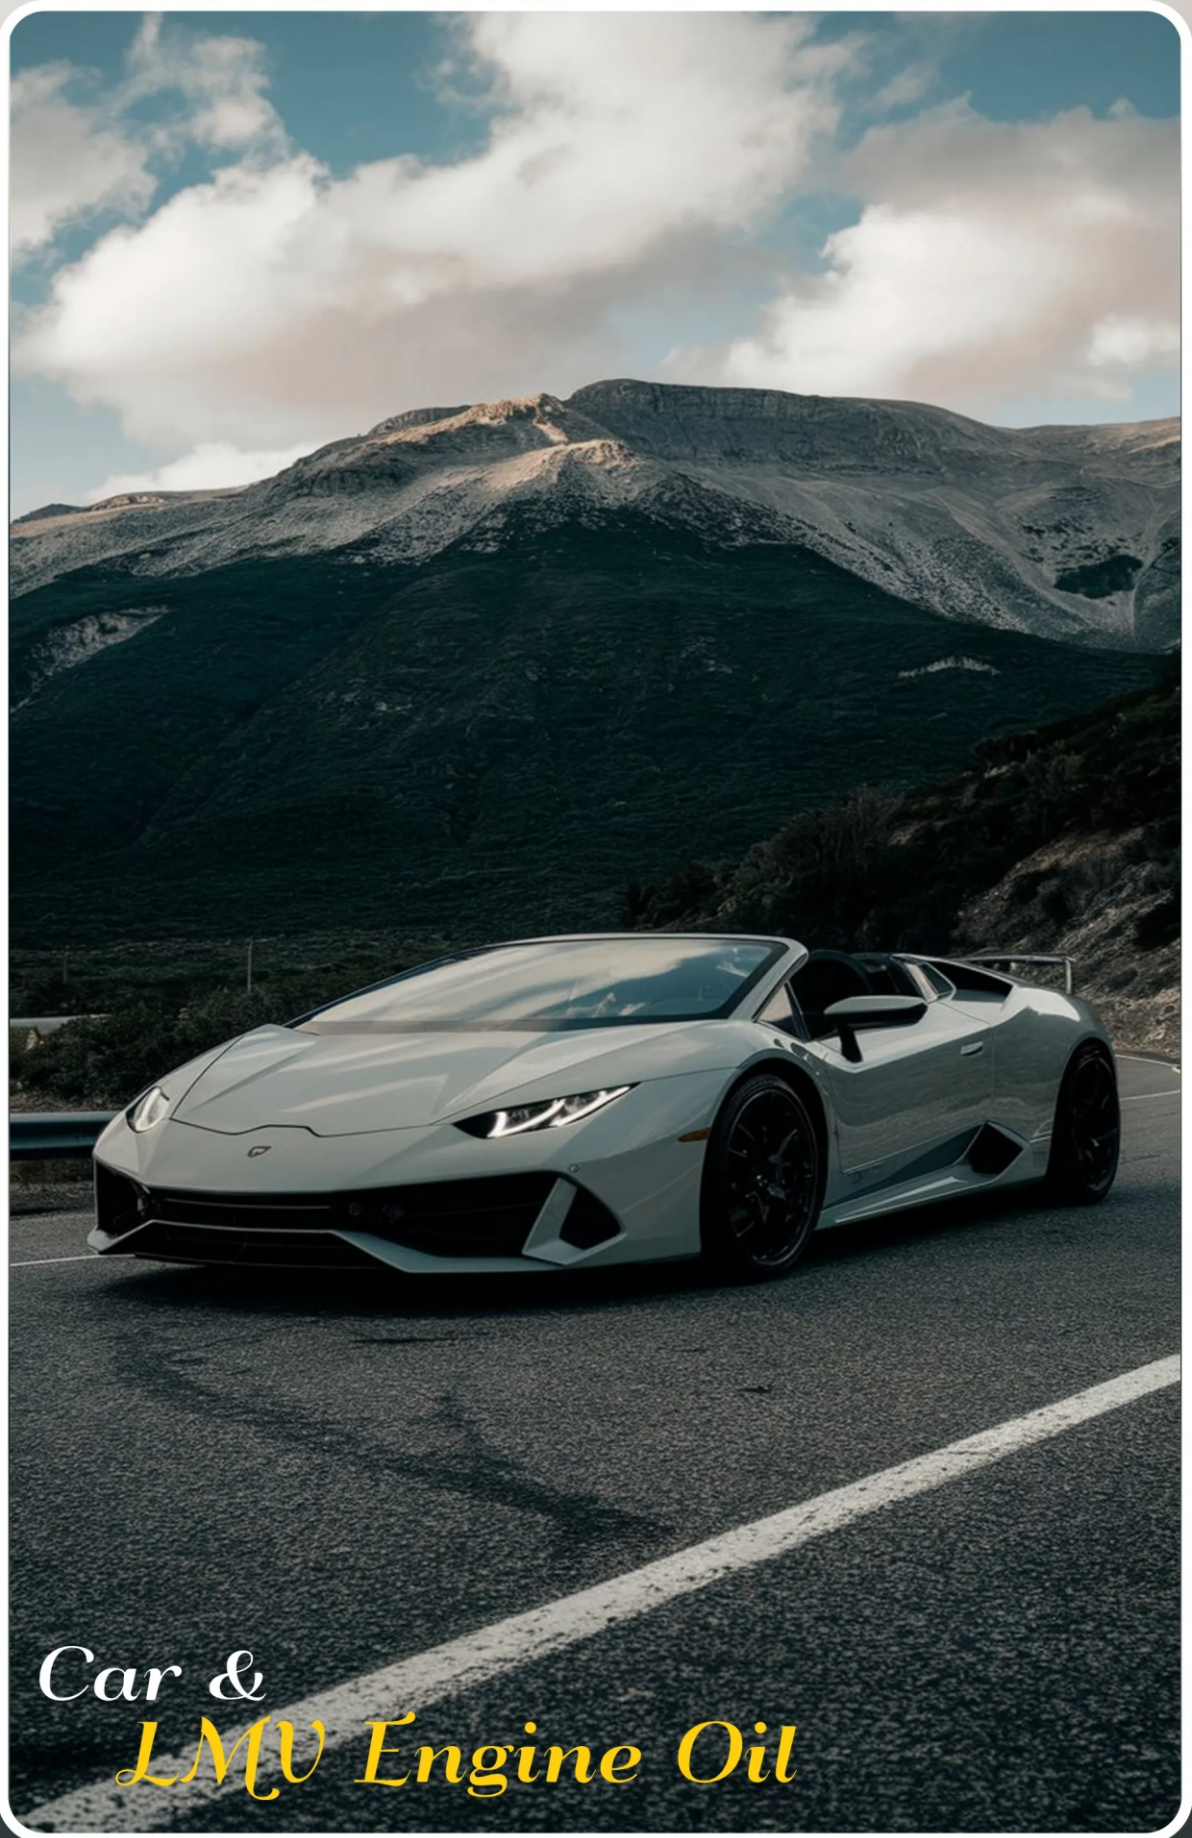

*Car &
LMV Engine Oil*

• CAR & LMV ENGINE OIL •

• NEXTGEN 0W16 API SP •



DESCRIPTION

Waxyty Full Synthetic Engine Oil API SP SAE 0W16 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SP | ILSAC GF-6B

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	8.0
Viscosity @40°C, cSt	ASTM D 445	41.35
Viscosity Index	ASTM D 2270	170
Pour Point, °C	ASTM D 97	-42
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr

• CARZGEN 0W20 API SP •

DESCRIPTION

Waxyty Full Synthetic Engine Oil API SP SAE 0W20 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SP | ILSAC GF-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	8.0
Viscosity @40°C, cSt	ASTM D 445	41.35
Viscosity Index	ASTM D 2270	170
Pour Point, °C	ASTM D 97	-42
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



• ULTRAGEN 0W30 API SP •



DESCRIPTION

Waxyty Full Synthetic Engine Oil API SP SAE 0W30 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SP | ILSAC GF-6A

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	11.0
Viscosity @40°C, cSt	ASTM D 445	61.60
Viscosity Index	ASTM D 2270	173
Pour Point, °C	ASTM D 97	-42
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr

• X-10 0W40 API SN/CF •

DESCRIPTION

Waxyty Full Synthetic Engine Oil API SN/CF 0W40 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SN/CF | ILSAC GF-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	14.50
Viscosity @40°C, cSt	ASTM D 445	86.55
Viscosity Index	ASTM D 2270	175
Pour Point, °C	ASTM D 97	-42
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



• CAR & LMV ENGINE OIL •

• PROTECH 5W20 API SN/CF •



DESCRIPTION

Waxyty Full Synthetic Engine Oil API SN/CF 5W20 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SN/CF | ILSAC GF-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	8.0
Viscosity @40°C, cSt	ASTM D 445	42.85
Viscosity Index	ASTM D 2270	162
Pour Point, °C	ASTM D 97	-39
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr

• HIGHTECH 5W30 API SN/CF •

DESCRIPTION

Waxyty Full Synthetic Engine Oil API SN/CF 5W30 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SN/CF | ACEA A5/B5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	11.50
Viscosity @40°C, cSt	ASTM D 445	68.20
Viscosity Index	ASTM D 2270	164
Pour Point, °C	ASTM D 97	-39
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



• LUCAS 5W40 API SN/CF •



DESCRIPTION

Waxyty Full Synthetic Engine Oil API SN/CF 5W40 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SN/CF | ACEA A3/B4

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	15.20
Viscosity @40°C, cSt	ASTM D 445	95.65
Viscosity Index	ASTM D 2270	168
Pour Point, °C	ASTM D 97	-39
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr

• ROYAL 10W30 API CI-4/SL •

DESCRIPTION

Waxyty Full Synthetic Engine Oil API CI-4 SL 10W30 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CI-4 SL | ACEA A3/B4

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.860
Viscosity @100°C, cSt	ASTM D 445	11.5
Viscosity @40°C, cSt	ASTM D 445	72.70
Viscosity Index	ASTM D 2270	152
Pour Point, °C	ASTM D 97	-33
Flash Point, °C	ASTM D 92	232
TBN, mgKOH/gm	ASTM D 892	11.0

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



— • CAR & LMV ENGINE OIL • —

— • MAGNET 10W40 API SN/CF • —



DESCRIPTION

Waxyty Full Synthetic Engine Oil API SN/CF 10W40 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SN/CF

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.860
Viscosity @100°C, cSt	ASTM D 445	15.50
Viscosity @40°C, cSt	ASTM D 445	105.95
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash Point, °C	ASTM D 92	232
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr

— • RIDE SYN 5W30 API SP • —

DESCRIPTION

Waxyty Full Synthetic Engine Oil API SP 5W30 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SP | ILSAC GF-6A

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	11.5
Viscosity @40°C, cSt	ASTM D 445	68.20
Viscosity Index	ASTM D 2270	164
Pour Point, °C	ASTM D 97	-39
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



— • DRIVE SYN 5W40 API SP • —



DESCRIPTION

Waxyty Full Synthetic Engine Oil API SP 5W40 is an advanced fully Synthetic motor oil designed to keep your engine running new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SP | ILSAC GF-6A

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	15.20
Viscosity @40°C, cSt	ASTM D 445	95.65
Viscosity Index	ASTM D 2270	168
Pour Point, °C	ASTM D 97	-39
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	7.1

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr

— • PREMIUM 15W40 API SL/CF • —

DESCRIPTION

Waxyty High Performance Technology Engine Oil API SL/CF SAE15W40 is an advanced High Performance Technology motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SL/CF | ACEA A3/B3

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.870
Viscosity @100°C, cSt	ASTM D 445	15.5
Viscosity @40°C, cSt	ASTM D 445	115
Viscosity Index	ASTM D 2270	142
Pour Point, °C	ASTM D 97	-27
Flash Point, °C	ASTM D 92	236
TBN, mgKOH/gm	ASTM D 892	7.2

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



• CAR & LMV ENGINE OIL •

• VARIOUS 20W50 API SL/CF •



DESCRIPTION

Waxyty High Performance Technology Engine Oil API SL/CF SAE20W50 is an advanced High Performance Technology motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SL/CF | ACEA A3/B3

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.880
Viscosity @100°C, cSt	ASTM D 445	19.50
Viscosity @40°C, cSt	ASTM D 445	169.27
Viscosity Index	ASTM D 2270	132
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	242
TBN, mgKOH/gm	ASTM D 892	7.2

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr

• SUPREME 20W60 API SL/CF •

DESCRIPTION

Waxyty High Performance Technology Engine Oil API SL/CF SAE20W60 is an advanced High Performance Technology motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SL/CF | ACEA A3/B3

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.880
Viscosity @100°C, cSt	ASTM D 445	24.5
Viscosity @40°C, cSt	ASTM D 445	223
Viscosity Index	ASTM D 2270	138
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	242
TBN, mgKOH/gm	ASTM D 892	7.2

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



• STAR 25W60 API SL/CF •



DESCRIPTION

Waxyty High Performance Technology Engine Oil API SL/CF SAE 25W60 is an advanced High Performance Technology motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SL/CF | ACEA A3/B3

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.880
Viscosity @100°C, cSt	ASTM D 445	24.5
Viscosity @40°C, cSt	ASTM D 445	223
Viscosity Index	ASTM D 2270	138
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	242
TBN, mgKOH/gm	ASTM D 892	7.2

PACKAGING SIZE

1 Ltr, 3 Ltr, 3.5 Ltr, 4 Ltr, 5Ltr,
20 Ltr, 55 Ltr, 210 Ltr



**SAVE MONEY &
NEEDS FEWER REPAIRS**



**QUIETER, COOLER,
SMOOTHER RUNNING
EQUIPMENT**



**USES LESS FUEL &
REDUCES FRICTION**



**INCREASES EFFICIENCY
AND HORSEPOWER**



**LOW OIL
CONSUMPTION**

20FT CONTAINER LOAD UP TO 28 TON MAX



PRODUCT SIZE

UNITS

WEIGHT

QUANTITY

TOTAL WEIGHT

500ML	CTN	25	13.86	KG	1144	CTN	15856	KG
1LTR	CTN	20	19.7	KG	882	CTN	17375	KG
1LTR	CTN	12	11.75	KG	1530	CTN	17978	KG
3LTR	CTN	6	18.24	KG	637	CTN	11616	KG
3.5LTR	CTN	6	20.09	KG	637	CTN	12794	KG
5LTR	CTN	4	19.5	KG	576	CTN	11232	KG
7.5LTR	PAIL	1	6.945	KG	1944	PAIL	13501	KG
10LTR	PAIL	1	9.66	KG	1344	PAIL	12983	KG
20LTR	PAIL	1	18.38	KG	756	PAIL	13892	KG
20LTR	DRUM	1	18.9	KG	1242	DRUM	23474	KG
26LTR	DRUM	1	23.14	KG	640	DRUM	14810	KG
50LTR	DRUM	1	47	KG	280	DRUM	13160	KG
55LTR	DRUM	1	51.5	KG	280	DRUM	14420	KG
208LTR	BARREL	1	202	KG	80	BARREL	16160	KG
210LTR	BARREL	1	203	KG	80	BARREL	16240	KG



Heavy Duty
Diesel Engine Oil

• HEAVY DUTY DIESEL ENGINE OIL •

• PREMIUM 15W40 API CF-4/SJ •



DESCRIPTION

Waxyty Heavy Duty Diesel Engine Oil API CF-4/SJ SAE 15W40 is an advanced Heavy Duty Diesel motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API-CF-4 SJ

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.867
Viscosity @100°C, cSt	ASTM D 445	14.40
Viscosity @40°C, cSt	ASTM D 445	107.50
Viscosity Index	ASTM D 2270	137
Pour Point, °C	ASTM D 97	-25
Flash Point, °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 892	9.5

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.

• EXTRA PREMIUM 15W40 API CH-4/SJ •

DESCRIPTION

Waxyty Heavy Duty Diesel Engine Oil API CH-4/SJ SAE 15W40 is an advanced Heavy Duty Diesel motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CH-4/SJ

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.870
Viscosity @100°C, cSt	ASTM D 445	15.5
Viscosity @40°C, cSt	ASTM D 445	115
Viscosity Index	ASTM D 2270	142
Pour Point, °C	ASTM D 97	-27
Flash Point, °C	ASTM D 92	235
TBN, mgKOH/gm	ASTM D 892	9.8

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.



• PREMIUM PLUS 15W40 API CI-4+/SL •



DESCRIPTION

Waxyty Heavy Duty Diesel Engine Oil API CI 4+/SL SAE 15W40 is an advanced Heavy Duty Diesel motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
CI-4+/SL

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.870
Viscosity @100°C, cSt	ASTM D 445	15.5
Viscosity @40°C, cSt	ASTM D 445	115
Viscosity Index	ASTM D 2270	142
Pour Point, °C	ASTM D 97	-27
Flash Point, °C	ASTM D 92	235
TBN, mgKOH/gm	ASTM D 892	11.0

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.

• ULTRA PRIME 15W40 API CK/4 SN •

DESCRIPTION

Waxyty Heavy Duty Synthetic Diesel Engine Oil API CK-4/SN SAE 15W40 is an advanced Heavy Duty Synthetic Diesel motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CK-4/SN

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.870
Viscosity @100°C, cSt	ASTM D 445	15.5
Viscosity @40°C, cSt	ASTM D 445	115
Viscosity Index	ASTM D 2270	142
Pour Point, °C	ASTM D 97	-27
Flash Point, °C	ASTM D 92	236
TBN, mgKOH/gm	ASTM D 892	9.6

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.



HEAVY DUTY DIESEL ENGINE OIL

MOTOFARM 20W40 API CH/SF



DESCRIPTION

Waxyty high performance multi grade diesel engine Oil API CH/SF SAE 20W40 is an advanced high performance multi grade motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CH/SF

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.881
Viscosity @100°C, cSt	ASTM D 445	14.5
Viscosity @40°C, cSt	ASTM D 445	126.4
Viscosity Index	ASTM D 2270	115
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	236
TBN, mgKOH/gm	ASTM D 892	7.2

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.

VARIOUS 20W50 API SL/CF

DESCRIPTION

Waxyty High Performance Technology Engine Oil API SL/CF SAE 20W50 is an advanced High Performance Technology motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API SL/CF

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.880
Viscosity @100°C, cSt	ASTM D 445	19.50
Viscosity @40°C, cSt	ASTM D 445	169.27
Viscosity Index	ASTM D 2270	132
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	242
TBN, mgKOH/gm	ASTM D 892	7.2

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.



SUPREME 20W60 API CI 4/SL



DESCRIPTION

Waxyty Heavy Duty Diesel Engine Oil API CI-4/SL 20W60 is an advanced Heavy Duty Diesel motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CI-4/SL

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.880
Viscosity @100°C, cSt	ASTM D 445	24.9
Viscosity @40°C, cSt	ASTM D 445	231.75
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	248
TBN, mgKOH/gm	ASTM D 892	11.0

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.

STAR 25W60 API CI-4/SL

DESCRIPTION

Waxyty Heavy Duty Diesel Engine Oil API CI-4/SL SAE 25W60 is an advanced Heavy Duty Diesel motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CI-4/ SL

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.882
Viscosity @100°C, cSt	ASTM D 445	25.0
Viscosity @40°C, cSt	ASTM D 445	234.9
Viscosity Index	ASTM D 2270	135
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	248
TBN, mgKOH/gm	ASTM D 892	11.0

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.



• HEAVY DUTY DIESEL ENGINE OIL •

• MONOGRADE SAE-40 API CF/SF •



DESCRIPTION

Waxyty Super Premium Engine Oil API CF/SF SAE 40 is an advanced Super Premium motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CF/SF

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.882
Viscosity @100°C, cSt	ASTM D 445	15.5
Viscosity @40°C, cSt	ASTM D 445	139.25
Viscosity Index	ASTM D 2270	115
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	250
TBN, mgKOH/gm	ASTM D 892	8.0

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.

• MONOGRADE SAE-50 API CF/SF •

DESCRIPTION

Waxyty Super Premium Engine Oil API CF/SF SAE 50 is an advanced Super Premium motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CF/SF

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.883
Viscosity @100°C, cSt	ASTM D 445	20.5
Viscosity @40°C, cSt	ASTM D 445	203.5
Viscosity Index	ASTM D 2270	118
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	254
TBN, mgKOH/gm	ASTM D 892	8.0

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.



• TURBO HD-50 API CF/SF •



DESCRIPTION

Waxyty Super Premium Engine Oil API CF/SF HD-50 is an advanced Super Premium motor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CF/SF

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.884
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	234
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	245
TBN, mgKOH/gm	ASTM D 892	8.0

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.



ENHANCED ENGINE PROTECTION

IMPROVED LUBRICATION

FUEL EFFICIENCY SUPPORT

COMPATIBLE WITH EMISSION SYSTEMS





*Agriculture &
3-Wheeler Engine Oil*

—• AGRICULTURE & 3-WHEELER ENGINE OIL —•

—• FARMER TRACTOR 20W40 API CH —•



DESCRIPTION

Waxyty High Performance Multi Grade Tractor engine Oil API CH SAE 20W40 is an advanced high performance multi grade tractor oil designed to keep your engine running like new by providing exceptional wear protection, cleaning power and overall performance.

MEETS OR EXCEEDS.
API CH

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.853
Viscosity @100°C, cSt	ASTM D 445	14.69
Viscosity @40°C, cSt	ASTM D 445	103.70
Viscosity Index	ASTM D 2270	146
Pour Point, °C	ASTM D 97	-30
Flash Point, °C	ASTM D 92	242
TBN, mgKOH/gm	ASTM D 892	7.8

PACKAGING SIZE

500ml, 1Ltr, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.

—• WAXITY UTTO 10W API GL-5 —•

DESCRIPTION

Waxyty UTTO is a highly developed multi-purpose oil which has been specially formulated for forestry and agricultural machinery. This product meets the requirements of today's combined drive systems (transmission and hydraulic) and wet brakes.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.879
Viscosity @100°C, cSt	ASTM D 445	11.8
Viscosity @40°C, cSt	ASTM D 445	74.1
Viscosity Index	ASTM D 2270	154
Pour Point, °C	ASTM D 97	-33
Flash Point, °C	ASTM D 92	222
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

500ml, 1Ltr, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.



—• X-2T API TC/JASO FC —•



DESCRIPTION

Waxyty X-2T API TC/JASO FC is a new generation semi-synthetic, extremely low smoke, environmentally friendly two stroke engine oil. It is blended from highly virgin mineral base oils, special synthetic base fluid and fortified with finely balanced low ash additives.

MEETS OR EXCEEDS.
API TC / JASO FC

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.847
Viscosity @100°C, cSt	ASTM D 445	7.2
Viscosity @40°C, cSt	ASTM D 445	42.2
Viscosity Index	ASTM D 2270	134
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	160
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

500ml, 1Ltr, 20Ltr, 55Ltr, 210Ltr

—• PUMPSET OIL SAE 40 API CC —•

DESCRIPTION

Waxyty Pumpset Oil SAE 40 API CC is a high-performance lubricant specifically formulated for diesel engine pump sets used in agricultural, industrial, and stationary applications. It combines advanced base oils with premium additives to deliver.

MEETS OR EXCEEDS.
API CC

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.852
Viscosity @100°C, cSt	ASTM D 445	13.90
Viscosity @40°C, cSt	ASTM D 445	105.13
Viscosity Index	ASTM D 2270	112
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	233
TBN, mgKOH/gm	ASTM D 892	5.6

PACKAGING SIZE

500ml, 1Ltr, 1200ml, 3Ltr, 3.5Ltr, 4Ltr, 5Ltr
7.5Ltr, 10Ltr, 20Ltr, 55Ltr, 210Ltr.





*Automotive Gear &
Transmission Oil*

• AUTOMOTIVE GEAR & TRANSMISSION OIL •

• WAXITY GEAR EP-90 API GL-5 •



DESCRIPTION

Waxity Lubricant Gear Oil SAE 90 API GL-5 are mixed with great mineral base oil, as well as some anti-wear and against froth added substance which has solid oxidation and frothing obstruction use in uncompromising activities.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.888
Viscosity @100°C, cSt	ASTM D 445	16.0
Viscosity @40°C, cSt	ASTM D 445	168
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-12
Flash Point, °C	ASTM D 92	245
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1 Ltr, 5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY GEAR EP-140 API GL-5 •

DESCRIPTION

Waxity Lubricant Gear Oil SAE 140 API GL-5 are mixed with great mineral base oil, as well as some anti-wear and against froth added substance which has solid oxidation and frothing obstruction use in uncompromising activities.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.890
Viscosity @100°C, cSt	ASTM D 445	23
Viscosity @40°C, cSt	ASTM D 445	315
Viscosity Index	ASTM D 2270	91
Pour Point, °C	ASTM D 97	-9
Flash Point, °C	ASTM D 92	247
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1 Ltr, 5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr



• WAXITY GEAR 75W90 API GL-5 •



DESCRIPTION

Waxity Lubricant Gear Oil SAE 75W90 API GL-5 are mixed with great mineral base oil, as well as some anti-wear and against froth added substance which has solid oxidation and frothing obstruction use in uncompromising activities.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.835
Viscosity @100°C, cSt	ASTM D 445	14.5
Viscosity @40°C, cSt	ASTM D 445	94
Viscosity Index	ASTM D 2270	160
Pour Point, °C	ASTM D 97	-39
Flash Point, °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1 Ltr, 5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY GEAR 80W90 API GL-5 •

DESCRIPTION

Waxity Lubricant Gear Oil SAE 80W90 API GL-5 are mixed with great mineral base oil, as well as some anti-wear and against froth added substance which has solid oxidation and frothing obstruction use in uncompromising activities.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.888
Viscosity @100°C, cSt	ASTM D 445	14.7
Viscosity @40°C, cSt	ASTM D 445	146
Viscosity Index	ASTM D 2270	100
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1 Ltr, 5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr



• AUTOMOTIVE GEAR & TRANSMISSION OIL •

• WAXITY GEAR 85W140 API GL-5 •



DESCRIPTION

Waxity Lubricant Gear Oil SAE 85W140 API GL-5 are mixed with great mineral base oil, as well as some anti-wear and against froth added substance which has solid oxidation and frothing obstruction use in uncompromising activities.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.890
Viscosity @100°C, cSt	ASTM D 445	25.6
Viscosity @40°C, cSt	ASTM D 445	356
Viscosity Index	ASTM D 2270	95
Pour Point, °C	ASTM D 97	-12
Flash Point, °C	ASTM D 92	270
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1Ltr, 5Ltr, 10 Ltr, 20Ltr, 26 Ltr
55 Ltr, 210 Ltr

AVAILABLE PACK SIZE PER BOX

100ml	90pcs	800ml, 850ml	25pcs	250gm	36pcs
175ml	70pcs	900ml, 1L	20pcs	500gm	36pcs
250ml	70pcs	1L	12pcs	1KG	18pcs
350ml	80pcs	2.5L, 3L, 3.5L	6pcs	2KG	12pcs
500ml, 650ml	25pcs	4L, 5L	4pcs	3KG	4pcs



40FT CONTAINER LOAD UP TO 28 TON MAX



PRODUCT SIZE

UNITS

WEIGHT

QUANTITY

TOTAL WEIGHT

500ML	CTN	25	13.86	KG	2020	CTN	27997	KG
1LTR	CTN	20	19.7	KG	1421	CTN	27994	KG
1LTR	CTN	12	11.75	KG	2382	CTN	27989	KG
3LTR	CTN	6	18.24	KG	1323	CTN	24125	KG
3.5LTR	CTN	6	20.09	KG	1323	CTN	26572	KG
5LTR	CTN	4	19.5	KG	1248	CTN	24336	KG
7.5LTR	PAIL	1	6.945	KG	3969	PAIL	27565	KG
10LTR	PAIL	1	9.66	KG	2688	PAIL	25966	KG
20LTR	PAIL	1	18.38	KG	1523	PAIL	27985	KG
20LTR	DRUM	1	18.9	KG	1480	DRUM	27972	KG
26LTR	DRUM	1	23.14	KG	1210	DRUM	27999	KG
50LTR	DRUM	1	47	KG	560	DRUM	26320	KG
55LTR	DRUM	1	51.5	KG	543	DRUM	27965	KG
208LTR	BARREL	1	202	KG	138	BARREL	27876	KG
210LTR	BARREL	1	203	KG	137	BARREL	27811	KG



Hydraulic Oil

• HYDRAULIC OIL •

• WAXITY HYDRAULIC ISO 10W •



DESCRIPTION

Waxy Hydraulic Oil ISO 10W is a high performance anti-wear hydraulic oil specifically formulated from selected base oils and a proprietary additive system to provide well balanced performance in a range of applications.

MEETS OR EXCEEDS.
DIN 51524 PART II

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.858
Viscosity @100°C, cSt	ASTM D 445	2.75
Viscosity @40°C, cSt	ASTM D 445	10.4
Viscosity Index	ASTM D 2270	105
Pour Point, °C	ASTM D 97	-15
Flash Point, °C	ASTM D 92	200
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1Ltr, 5Ltr, 10 Ltr, 20Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY HYDRAULIC ISO 32 •

DESCRIPTION

Waxy Hydraulic Oil ISO 32 is a high performance anti-wear hydraulic oil specifically formulated from selected base oils and a proprietary additive system to provide well balanced performance in a range of applications.

MEETS OR EXCEEDS.
DIN 51524 PART II

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	5.38
Viscosity @40°C, cSt	ASTM D 445	32.4
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-24
Flash Point, °C	ASTM D 92	232
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1Ltr, 5Ltr, 10 Ltr, 20Ltr, 26 Ltr
55 Ltr, 210 Ltr



• WAXITY HYDRAULIC ISO 46 •



DESCRIPTION

Waxy Hydraulic Oil ISO 46 is a high performance anti-wear hydraulic oil specifically formulated from selected base oils and a proprietary additive system to provide well balanced performance in a range of applications.

MEETS OR EXCEEDS.
DIN 51524 PART II

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	6.78
Viscosity @40°C, cSt	ASTM D 445	46.8
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-30
Flash Point, °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1Ltr, 5Ltr, 10 Ltr, 20Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY HYDRAULIC ISO 68 •

DESCRIPTION

Waxy Hydraulic Oil ISO 68 is a high performance anti-wear hydraulic oil specifically formulated from selected base oils and a proprietary additive system to provide well balanced performance in a range of applications.

MEETS OR EXCEEDS.
DIN 51524 PART II

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.875
Viscosity @100°C, cSt	ASTM D 445	8.72
Viscosity @40°C, cSt	ASTM D 445	68.9
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-21
Flash Point, °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

1Ltr, 5Ltr, 10 Ltr, 20Ltr, 26 Ltr
55 Ltr, 210 Ltr





Specialized Products

• SPECIAL AUTOMOTIVE PRODUCTS •

• WAXITY ATF(TQ) TYPE A •



DESCRIPTION

Waxity Automatic Transmission Fluid TYPE A is a superior quality automatic transmission fluid meeting TYPE A specifications. It is formulated to provide smooth shifting in the automatic and semi-automatic transmission due to high quality of base oil.

MEETS OR EXCEEDS.
ATF TYPE A

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 C, gm/CC	ASTM D 4052	0.860
Viscosity @100C, cSt	ASTM D 445	7.6
Viscosity @40C, cSt	ASTM D 445	41.3
Viscosity Index	ASTM D 2270	155
Pour Point, C	ASTM D 97	-28
Flash Point, C	ASTM D 92	215
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

500 ml, 1 Ltr, 5 Ltr, 20Ltr
55 Ltr, 210 Ltr

• WAXITY BRAKE OIL DOT-3 •

DESCRIPTION

Waxity DOT 3 BRAKE FLUID is a high- quality synthetic brake and clutch fluid conforming to the DOT 3 specification and based on poly glycol type fluid that is a general standard used in worldwide automotive brake equipment.

MEETS OR EXCEEDS.
FMVSS 116 DOT 3

SPECIFICATION

Appearance	VISUAL	Transparent
Equilibrium reflux boiling point C	FMVSS 116	205max
Wet equilibrium RBP	FMVSS 116	140min
Kinematic Viscosity@ 100 C	ASTM D 445	>1.5
PH	FMVSS 116	7.5-11.0
Specific Gravity 60 F	ASTM D 1298	1.07-1.15
Flash Point, C	ASTM D 92	130min
Pour Point, C	ASTM D 97	-

PACKAGING SIZE

100 ml, 250 ml, 500 ml, 1 Ltr, 5 Ltr
20 Ltr, 55 Ltr, 210 Ltr



• WAXITY BRAKE OIL DOT-4 •

DESCRIPTION

Waxity DOT 4 BRAKE FLUID is a high- quality synthetic brake and clutch fluid conforming to the DOT 4 specification and based on poly glycol type fluid that is a general standard used in worldwide automotive brake equipment.

MEETS OR EXCEEDS.
FMVSS 116 DOT 4

SPECIFICATION

Appearance	VISUAL	Transparent
Equilibrium reflux boiling point C	FMVSS 116	235 max
Wet equilibrium RBP	FMVSS 116	150 min
Kinematic Viscosity@ 100 C	ASTM D 445	>1.5
PH	FMVSS 116	7.5-11.0
Specific Gravity 60 F	ASTM D 1298	1.07-1.15
Flash Point, C	ASTM D 92	121 min
Pour Point, C	ASTM D 97	-

PACKAGING SIZE

100 ml, 250 ml, 500 ml, 1 Ltr, 5 Ltr
20 Ltr, 55 Ltr, 210 Ltr



• WAXITY FORK OIL •

DESCRIPTION

WAXITY Fork Oil 10W is an advanced mineral -based suspension fluid designed to provide the optimum damping performance in all on and off-road suspensions. Its highly refined base stock and naturally high viscosity index

MEETS OR EXCEEDS.

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 C, gm/CC	ASTM D 4052	0.880
Viscosity @100C, cSt	ASTM D 445	6.3
Viscosity @40C, cSt	ASTM D 445	32
Viscosity Index	ASTM D 2270	150
Pour Point, C	ASTM D 97	-39
Flash Point, C	ASTM D 92	210
TBN, mgKOH/gm	ASTM D 892	0.0

PACKAGING SIZE

175 ml, 350ml, 1Ltr, 5Ltr,
20Ltr, 55Ltr, 210Ltr





Industrial & Textile Oil

• INDUSTRIAL & TEXTILE OIL •

• WAXITY GEAR EP-100 API GL-5 •



DESCRIPTION

Waxity Gear EP-100 are high performance extreme pressure oils designed for lubrication of heavy duty industrial gears. These are formulated with high quality mineral base oils along with specially selected additive.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.890
Viscosity @100°C, cSt	ASTM D 445	14.43
Viscosity @40°C, cSt	ASTM D 445	101.2
Viscosity Index	ASTM D 2270	>95
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY GEAR EP-150 API GL-5 •

DESCRIPTION

Waxity Gear EP-150 are high performance extreme pressure oils designed for lubrication of heavy duty industrial gears. These are formulated with high quality mineral base oils along with specially selected additive.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.893
Viscosity @100°C, cSt	ASTM D 445	16.02
Viscosity @40°C, cSt	ASTM D 445	145.2
Viscosity Index	ASTM D 2270	>95
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr



• WAXITY GEAR EP-220 API GL-5 •



DESCRIPTION

Waxity Gear EP-220 are high performance extreme pressure oils designed for lubrication of heavy duty industrial gears. These are formulated with high quality mineral base oils along with specially selected additive.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.896
Viscosity @100°C, cSt	ASTM D 445	18.11
Viscosity @40°C, cSt	ASTM D 445	242
Viscosity Index	ASTM D 2270	>95
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY GEAR EP-320 API GL-5 •

DESCRIPTION

Waxity Gear EP-320 are high performance extreme pressure oils designed for lubrication of heavy duty industrial gears. These are formulated with high quality mineral base oils along with specially selected additive.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.899
Viscosity @100°C, cSt	ASTM D 445	24.02
Viscosity @40°C, cSt	ASTM D 445	322
Viscosity Index	ASTM D 2270	>95
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr



• INDUSTRIAL & TEXTILE OIL •

• WAXITY GEAR EP-460 API GL-5 •



DESCRIPTION

Waxity Gear EP-460 are high performance extreme pressure oils designed for lubrication of heavy duty industrial gears. These are formulated with high quality mineral base oils along with specially selected additive.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.899
Viscosity @100°C, cSt	ASTM D 445	30.55
Viscosity @40°C, cSt	ASTM D 445	457
Viscosity Index	ASTM D 2270	>95
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY GEAR EP-680 API GL-5 •

DESCRIPTION

Waxity Gear EP-680 are high performance extreme pressure oils designed for lubrication of heavy duty industrial gears. These are formulated with high quality mineral base oils along with specially selected additive.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.899
Viscosity @100°C, cSt	ASTM D 445	38.11
Viscosity @40°C, cSt	ASTM D 445	678
Viscosity Index	ASTM D 2270	>95
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr



• WAXITY SPINDLE OIL ISO-10 •



DESCRIPTION

Waxity Spindle Oil 10 is based upon highly mineral base stocks enhanced with rust and oxidation inhibitors and formulated especially for the lubrication of high speed and precision machine tool spindle bearings.

MEETS OR EXCEEDS.
ISO 10

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	2.6
Viscosity @40°C, cSt	ASTM D 445	10.00
Viscosity Index	ASTM D 2270	104
Pour Point, °C	ASTM D 97	-22
Flash Point, °C	ASTM D 92	226
TBN, mgKOH/gm	ASTM D 892	-

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY WARPING OIL •

DESCRIPTION

Waxity Warping Oil has been specially designed for warping application of textile yarn. Weaving of textile is a process of interlacing warps with wefts. In a fabric, longitudinal yarns are called warps and lateral or cross yarns are called wefts.

MEETS OR EXCEEDS.

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C, gm/CC	ASTM D 4052	0.848
Viscosity @100°C, cSt	ASTM D 445	5.2
Viscosity @40°C, cSt	ASTM D 445	30.16
Viscosity Index	ASTM D 2270	104
Pour Point, °C	ASTM D 97	-26
Flash Point, °C	ASTM D 92	226
TBN, mgKOH/gm	ASTM D 892	-

PACKAGING SIZE

55 Ltr, 210 Ltr



• INDUSTRIAL & TEXTILE OIL •

• WAXITY LOOMS OIL-460 •



DESCRIPTION

Waxity Looms Oil 460 are high performance extreme pressure oils designed for lubrication of heavy duty industrial gears. These are formulated with high quality mineral base oils along with specially selected additive.

MEETS OR EXCEEDS.
API GL-5

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.899
Viscosity @100°C, cSt	ASTM D 445	30.55
Viscosity @40°C, cSt	ASTM D 445	457
Viscosity Index	ASTM D 2270	>95
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr

• WAXITY COMPRESSOR OIL-150 •

DESCRIPTION

Waxity Compressor Oil 150 are high quality, high performance mineral oils developed for reciprocating air compressors. They are formulated from highly refined, high viscosity index base stocks and high-performance additives with ashless chemistry.

MEETS OR EXCEEDS.
ISO/ DP 6521

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.893
Viscosity @100°C, cSt	ASTM D 445	16.02
Viscosity @40°C, cSt	ASTM D 445	145.2
Viscosity Index	ASTM D 2270	105
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr



• WAXITY COMPRESSOR OIL-220 •

DESCRIPTION

Waxity Compressor Oil 220 are high quality, high performance mineral oils developed for reciprocating air compressors. They are formulated from highly refined, high viscosity index base stocks and high-performance additives with ashless chemistry.

MEETS OR EXCEEDS.
ISO/ DP 6521

SPECIFICATION

Appearance	VISUAL	C&B
Density @29.5 °C,gm/CC	ASTM D 4052	0.896
Viscosity @100°C, cSt	ASTM D 445	18.11
Viscosity @40°C, cSt	ASTM D 445	242
Viscosity Index	ASTM D 2270	105
Pour Point, °C	ASTM D 97	-18
Flash Point, °C	ASTM D 92	234
TBN, mgKOH/gm	ASTM D 892	1b

PACKAGING SIZE

5 Ltr, 10 Ltr, 20 Ltr, 26 Ltr
55 Ltr, 210 Ltr





*Automotive &
Industrial Grease*

● AUTOMOTIVE & INDUSTRIAL GREASE ●

● WAXITY EP-2 GREASE ●



DESCRIPTION

Waxy EP-2 is a general purpose lithium grease formulated to provide protection against wear, corrosion and water washout. Available as an NLGI 2 grade with a base oil to address a variety of both industrial and commercial vehicle applications.

MEETS OR EXCEEDS.
NLGI-2 | LITHIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	2
Soap Type	-	Lithium Complex
Viscosity Of Oil@100°C, cSt	ASTM D 445	18
Viscosity Of Oil @40°C, cSt	ASTM D 445	105
Worked Penetration@25°C	ASTM D 217	275
Drop Point, °C	ASTM D 2265	195
Water Washout@79 °C	ASTM D 1264	<10
Copper Stripe Corrosion	ASTM D 4048	1B

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg

● WAXITY EP-0 GREASE ●

DESCRIPTION

Waxy EP-0 grease is multipurpose extreme pressure lithium soap based grease for use in a wide range of heavy duty on-road trucking and automotive applications as well as varied industrial applications.

MEETS OR EXCEEDS.
NLGI-0 | LITHIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	0
Soap Type	-	Lithium
Viscosity Of Oil@100°C, cSt	ASTM D 445	32
Viscosity Of Oil @40°C, cSt	ASTM D 445	180
Worked Penetration@25°C	ASTM D 217	370
Drop Point, °C	ASTM D 2265	180
Water Washout@79 °C	ASTM D 1264	<10
Copper Stripe Corrosion	ASTM D 4048	1B

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg



● WAXITY EP-00 GREASE ●



DESCRIPTION

Waxy EP-00 grease is multipurpose extreme pressure lithium soap based grease for use in a wide range of heavy duty on-road trucking and automotive applications as well as varied industrial applications.

MEETS OR EXCEEDS.
NLGI-00 | LITHIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	00
Soap Type	-	Lithium
Viscosity Of Oil@100°C, cSt	ASTM D 445	32
Viscosity Of Oil @40°C, cSt	ASTM D 445	180
Worked Penetration@25°C	ASTM D 217	415
Drop Point, °C	ASTM D 2265	170
Water Washout@79 °C	ASTM D 1264	<10
Copper Stripe Corrosion	ASTM D 4048	1B

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg

● WAXITY EP-000 GREASE ●

DESCRIPTION

Waxy EP-000 grease is multipurpose extreme pressure lithium soap based grease for use in a wide range of heavy duty on-road trucking and automotive applications as well as varied industrial applications.

MEETS OR EXCEEDS.
NLGI-000 | LITHIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	000
Soap Type	-	Lithium
Viscosity Of Oil@100°C, cSt	ASTM D 445	32
Viscosity Of Oil @40°C, cSt	ASTM D 445	180
Worked Penetration@25°C	ASTM D 217	455
Drop Point, °C	ASTM D 2265	160
Water Washout@79 °C	ASTM D 1264	<10
Copper Stripe Corrosion	ASTM D 4048	1B

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg



● AUTOMOTIVE & INDUSTRIAL GREASE ●

● WAXITY AP-3 GREASE ●



DESCRIPTION

Waxy AP-3 Grease is all purpose lithium soap base grease having excellent shear stability, high load carrying properties & prevent welding & seizure of moving parts under shock loading conditions. These greases are recommended for industrial & automotive, earth moving equipment

MEETS OR EXCEEDS.
NLGI-3 | LITHIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	3
Soap Type	-	Lithium
Viscosity Of Oil@100°C, cSt	ASTM D 445	32
Viscosity Of Oil @40°C, cSt	ASTM D 445	180
Worked Penetration@25°C	ASTM D 217	455
Drop Point, °C	ASTM D 2265	160
Water Washout@79 °C	ASTM D 1264	<10
Copper Stripe Corrosion	ASTM D 4048	1B

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg

● WAXITY MP-3 GREASE ●

DESCRIPTION

Waxy MP-3 Grease is a premium quality calcium based multi purpose grease manufactured from superior quality base oils. This grease is fortified with a well-balanced additive chemistry comprising of antioxidant, anti-wear and anti-rust additives.

MEETS OR EXCEEDS.
NLGI-3 | CALCIUM

SPECIFICATION

TEST	METHOD	RESULT
Appearance	-	Light Yellow
Soap Type	-	Calcium
Viscosity Of Oil@100°C, cSt	ASTM D 445	18
Viscosity Of Oil @40°C, cSt	ASTM D 445	62
Worked Penetration@25°C	ASTM D 217	237
Drop Point, °C	ASTM D 2265	106
Water Washout@79 °C	ASTM D 1264	<5
Copper Stripe Corrosion	ASTM D 4048	Negative

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg



● WAXITY GEL GREASE ●

DESCRIPTION

Waxy Gel Grease is a premium quality calcium based shiny gel type grease formulated using premium quality base oil, special calcium-based thickener technology and advanced additive package. This grease offers exceptional shear stability and load carrying capacity.

MEETS OR EXCEEDS.
NLGI-3 | CALCIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	3
Soap Type	-	Calcium
Viscosity Of Oil@100°C, cSt	ASTM D 445	18
Viscosity Of Oil @40°C, cSt	ASTM D 445	62
Worked Penetration@25°C	ASTM D 217	235
Drop Point, °C	ASTM D 2265	106
Water Washout@79 °C	ASTM D 1264	<5
Copper Stripe Corrosion	ASTM D 4048	Negative

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg



● WAXITY RED GEL GREASE ●

DESCRIPTION

Waxy Red Gel Grease is a premium quality calcium based shiny gel type grease formulated using premium quality base oil, special calcium-based thickener technology and advanced additive package. This grease offers exceptional shear stability and load carrying capacity.

MEETS OR EXCEEDS.
NLGI-3 | CALCIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	3
Soap Type	-	Calcium
Viscosity Of Oil@100°C, cSt	ASTM D 445	18
Viscosity Of Oil @40°C, cSt	ASTM D 445	62
Worked Penetration@25°C	ASTM D 217	235
Drop Point, °C	ASTM D 2265	106
Water Washout@79 °C	ASTM D 1264	<5
Copper Stripe Corrosion	ASTM D 4048	Negative

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg



—● AUTOMOTIVE & INDUSTRIAL GREASE ●—

—● WAXITY TITANIUM-3 GREASE ●—



DESCRIPTION

Waxy TITANIUM-3 GREASE is high performance lithium complex grease designed for lubrication of bearings of most automotive and industrial equipment. This grease is based on high quality mineral base fluid and superior lithium complex soap thickener fortified with excellent anti oxidation systems.

MEETS OR EXCEEDS.
NLGI-3 | LITHIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	3
Soap Type	-	Lithium complex
Viscosity Of Oil@100C, cSt	ASTM D 445	18
Viscosity Of Oil @40C, cSt	ASTM D 445	220
Worked Penetration@25C	ASTM D 217	236
Drop Point, C	ASTM D 2265	>265
Water Washout@79 C	ASTM D 1264	<5
Copper Stripe Corrosion	ASTM D 4048	1A

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg

—● WAXITY HIGH TEMPERATURE GREASE ●—

DESCRIPTION

Waxy High Temperature Grease is a high performance, multipurpose lithium complex grease developed using an optimized combination of high-quality mineral oil, thickener technology and a specially selected additive system enabling reliable performance across a wide range of temperatures.

MEETS OR EXCEEDS.
NLGI-2 | LITHIUM

SPECIFICATION

TEST	METHOD	RESULT
NLGI Grade	-	2
Soap Type	-	Clay
Viscosity Of Oil@100C, cSt	ASTM D 445	40.90
Viscosity Of Oil @40C, cSt	ASTM D 445	500
Worked Penetration@25C	ASTM D 217	275
Drop Point, C	ASTM D 2265	>280
Water Washout@79 C	ASTM D 1264	<5
Copper Stripe Corrosion	ASTM D 4048	1A

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg



—● WAXITY CHASSIS GREASE ●—



DESCRIPTION

Waxy Chassis Grease is premium quality sodium based automotive grease manufactured from superior quality base stocks and specially selected additives. Chassis grease is having moderately high drop points, resistance to oxidation, good thermal and structural stability.

MEETS OR EXCEEDS.
SODIUM GREASE

SPECIFICATION

TEST	METHOD	RESULT
Appearance	-	Greenish Brown
Soap Type	-	Sodium
UnWorked Penetration C	0.1 mm units	290-320
Titled Leakag, Max	-	5
Worked Penetration @25C	ASTM D 217	290-320
Drop Point, C	ASTM D 2265	95
Water, % wt, Max	-	0.1
Copper Stripe Corrosion	ASTM D 4048	1B

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg

—● WAXITY WHEEL BEARING GREASE ●—

DESCRIPTION

Waxy Wheel Bearing Grease is heavy duty sodium soap automotive grease formulated with tailor-made fats mineral oil and selected additives to ensure good stability and load bearing capacity under the most severe conditions. wheel bearing Grease does not melt even at extended hauling.

MEETS OR EXCEEDS.
SODIUM GREASE

SPECIFICATION

TEST	METHOD	RESULT
Appearance	-	Dark Greenish Brown
Soap Type	-	Sodium
UnWorked Penetration C	0.1 mm units	235-255
Titled Leakag, Max	-	5
Worked Penetration @25C	ASTM D 217	235-255
Drop Point, C	ASTM D 2265	178
Water, % wt, Max	-	0.1
Copper Stripe Corrosion	ASTM D 4048	1B

PACKAGING SIZE

1 Kg, 2 Kg, 5 Kg, 10 kg, 18 Kg, 180 Kg





Protect Our Engine, Secure Our Future



Plot No. 51-52-53, Shiv Bhakti Industries,
Kadodara To Palsana Highway, Karan, Village
Sanki, Chalthan, Surat, Gujarat, 394305



+91 96247 15666



care@waxitylubricant.com



www.waxitylubricant.com